

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 December 2004 (09.12.2004)


PCT

(10) International Publication Number
WO 2004/107706 A1

- (51) International Patent Classification⁷: **H04L 29/06, G06F 1/00**
- (21) International Application Number: **PCT/IB2003/005328**
- (22) International Filing Date:
20 November 2003 (20.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
03405393.4 30 May 2003 (30.05.2003) EP
- (71) Applicant (for all designated States except US): **INTERNATIONAL BUSINESS MACHINES CORPORATION** [US/US]; New Orchard Road, Armonk, NY 10504 (US).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **RIORDAN, James, F.** [US/CH]; Alte Landstrasse 50, CH-8803 Rueschlikon (CH).
- (74) Agent: **KLETT, Peter, M.**; International Business Machines Corporation, Saeumerstrasse 4 / Postfach, CH-8803 Rueschlikon (CH).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: DETECTING NETWORK ATTACKS

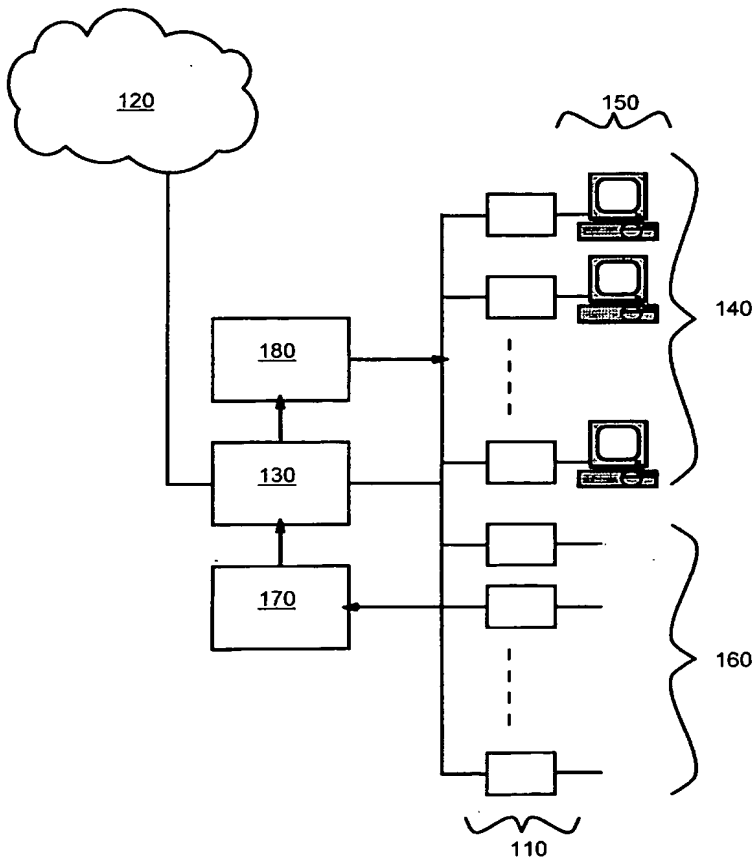

(57) Abstract: Described is a technique for detecting attacks on a data communications network having a plurality of addresses for assignment to data processing systems in the network. The technique involves identifying data traffic on the network originating at any assigned address and addressed to any unassigned address. Any data traffic so identified is inspected for data indicative of an attack. On detection of data indicative of an attack, an alert signal is generated.



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

DETECTING NETWORK ATTACKS**Technical Field**

The present invention generally relates to detecting network attacks and particularly relates to methods, apparatus, and
5 computer program elements for detecting attacks on a data communications network

Background of the Invention

The Internet is a wide area data communications network formed from a plurality of interconnected data networks. In
10 operation, the Internet facilitates data communications between a range of remotely situated data processing systems. Such data processing systems each typically comprise a central processing unit (CPU), a memory subsystem, and input/output (I/O) subsystem, and computer program code stored in the
15 memory subsystem for execution by the CPU. Typically, end user data processing systems connected to the Internet are referred to as client data processing systems or simply clients. Similarly, data processing systems hosting web sites and services for access by end users via the Internet are referred
20 to as server data processing systems or simply servers. There is a client-server relationship completed via the Internet between the end user data processing systems and the hosting data processing systems.

The Internet has become an important communications network
25 for facilitating electronically effected commercial interactions between consumers, retailers, and service providers. Access to the Internet is typically provided to such entities via an Internet Service Provider (ISP). Each ISP typically operates an open network to which clients subscribe.
30 Each client is provided with a unique Internet Protocol (IP) address on the network. Similarly, each server on the network is provided with a unique IP address. The network operated by the ISP is connected to the Internet via a dedicated data

processing system usually referred to as a router. In operation, the router directs inbound communication traffic from the Internet to specified IP addresses on the network. Similarly, the router directs outbound communication traffic
5 from the network in the direction of specified IP addresses on the Internet.

A problem faced by many ISPs is the increasing frequency of electronic attacks to the networks they operate. Such attacks include computer virus attacks and so-called "worm" attacks.
10 Attacks of this nature introduce significant performance degradation in networks operated by ISPs. Infected systems connected to the network typically attempt to spread the infection within the network. Many users do not recognize that their systems are infected. It would be desirable to provide
15 technology for triggering disinfection of such systems in the interests of increasing network performance.

Summary of the Invention

In accordance with the present invention, there is now provided a method for detecting attacks on a data
20 communications network having a plurality of addresses for assignment to data processing systems in the network, the method comprising: identifying data traffic on the network originating at any assigned address and addressed to any unassigned address; inspecting any data traffic so identified
25 for data indicative of an attack; and, on detection of data indicative of an attack, generating an alert signal.

The term "unassigned" herein is meant as covering an address that is not assigned to a physical device other than an apparatus for detecting an intrusion or generating an attack signature.
30 The apparatus that is designed to execute the method according to the invention will be the device those "unassigned" addresses are actually assigned to in order to make use of the invention. Those addresses are insofar unassigned as they are

not assigned to any device that does have another functionality apart from signature generation or intrusion detection. Thereby data traffic that is addressed to such an unassigned address will be received by that apparatus and
5 subjected to the claimed method.

The inspecting preferably comprises spoofing replies to requests contained in the data traffic identified. A preferred embodiment of the present invention comprises, on generation of the alert signal, rerouting any data traffic originating at
10 the address assigned to the data processing system originating the data indicative of the attack to a disinfection address on the network. On generation of the alert signal, an alert message may be sent to the disinfection address. The alert message may comprise data indicative of the attack detected.
15 On receipt of the alert message, a warning message may be sent from the disinfection address to the address assigned to the data processing system originating the data indicative of the attack. The warning message may include program code for eliminating the attack when executed by the data processing
20 system originating the data indicative of the attack.

Viewing the present invention from another aspect, there is now provided apparatus for detecting attacks on a data communications network having a plurality of addresses for assignment to data processing systems in the network, the
25 apparatus comprising: an intrusion detection sensor (IDS) for identifying data traffic on the network originating at any assigned address and addressed to any unassigned address, inspecting any data traffic so identified for data indicative of an attack, and, on detection of data indicative of an
30 attack, generating an alert signal.

The IDS in use preferably inspects the data traffic identified through spoofing replies to requests contained in the data traffic identified. The apparatus may also comprise a router connected to the intrusion detection sensor for rerouting, in
35 response to generation of the alert signal, any data traffic

originating at the address assigned to the data processing system originating the data indicative of the attack to a disinfection address on the network. Preferably, the IDS, on generation of the alert signal, sends an alert message to the
5 disinfection address. The alert message preferably comprises data indicative of the attack detected. A preferred embodiment of the present invention further comprises a disinfection server assigned to the disinfection address, the disinfection server sending, on receipt of the alert message, a warning
10 message to the address assigned to the data processing system originating the data indicative of the attack.

The present invention also extends to a data communications network comprising: a plurality of addresses for assignment to data processing systems in the network; and, apparatus for
15 detecting attacks on the network as herein before described.

The present invention further extends to a computer program element comprising computer program code means which, when loaded in a processor of a data processing system, configures the processor to perform a method for detecting attacks on a
20 data communications network as herein before described.

In a preferred embodiment of the present invention, there is provided a data communications network comprising: a router for connecting a plurality of data processing systems to the Internet; an IDS connected to the router; and a disinfection
25 server also connected to the router. In response to the IDS detecting that one of the data processing systems is infected by an attack, the IDS instructs the router to deflect all network traffic from that attack to the disinfection server. The IDS simultaneously supplies disinfection data to the
30 disinfection server. The disinfection data is indicative of: the nature of the infection; how to disinfect the infecting system; and how to resume normal network connectivity.

There are generally a large number of free IP addresses on a given network. In a particularly preferred embodiment of the

present invention, the IDS listens on the network for traffic directed toward the free IP addresses. No such traffic should exist. In the event that a request sent to one of the free IP addresses is detected, the IDS spoofs an answer to the
5 request. The free IP addresses are not in use. Thus, any attempt to contact, for example, a server at such an address is *a priori* suspicious. The IDS then listens for a reply to the spoofed answer. If the IDS detects a diagnosable attack in the reply, it signals the router to divert all traffic from
10 the infected system to the disinfection server. Because, the IDS is interactively spoofing responses to infected systems, it has an accurate view of each attack. Thus, false positives are minimized.

Brief Description of the Figures

15 Preferred embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a block diagram of a data processing system;

Figure 2 is a block diagram of a data processing network
20 embodying the present invention;

Figure 3 is a block diagram of an intrusion detection sensor embodying the present invention; and,

Figure 4 is a flow diagram associated with the intrusion detection sensor.

25 Detailed Description

Referring first to Figure 1, a data processing system comprises a CPU 10, an I/O subsystem 20, and a memory subsystem 40, all interconnected by a bus subsystem 30. The memory subsystem 40 may comprise random access memory (RAM),
30 read only memory (ROM), and one or more data storage devices

such as hard disk drives, optical disk drives, and the like. The I/O subsystem 20 may comprise: a display; a printer; a keyboard; a pointing device such as a mouse, tracker ball, or the like; and one or more network connections permitting
5 communications between the data processing system and one or more similar systems and/or peripheral devices via a data communications network. The combination of such systems and devices interconnected by such a network may itself form a distributed data processing system. Such distributed systems
10 may be themselves interconnected by additional data communications networks.

In the memory subsystem 40 is stored data 60 and computer program code 50 executable by the CPU 10. The program code 50 includes operating system software 90 and application software
15 80. The operating system software 90, when executed by the CPU 10, provides a platform on which the application software 80 can be executed.

Referring now to Figure 2, in a preferred embodiment of the present invention, there is provided a data communications
20 network 100 having a plurality of addresses 110 for assignment to data processing systems in the network. In a particularly preferred embodiment of the present invention, the network 100 is in the form of an Internet service installation having a plurality of assignable Internet Protocol (IP) addresses 110.
25 The network 100 is connected to the Internet 120 via a router 130. The router 130 may be implemented in form of a data processing system as herein before described with reference to Figure 1 dedicated by appropriate programming to the task to route communication traffic in the form of data packets
30 between the Internet 120 and the network 100 based on IP address data specified in the data packets. A first group 140 of the IP addresses 110 on the network 100 are assigned to systems 150 belonging to users of the Internet service. Each system 150 may be a data processing system as herein before
35 described with reference to Figure 1. A second group 160 of the IP addresses 110 on the network 100 are free. More

specifically, the second group 160 of IP addresses 110 are not assigned to user systems 150. An intrusion detection sensor (IDS) 170 is also connected to the network 100. The IDS 170 is also connected to the router 130. Details of the IDS 170 will
5 be provided further below. The router 130 is connected to a disinfection server 180. The disinfection server 180 may be implemented by a data processing system as herein before described with reference to Figure 1.

With reference to Figure 3, in a particularly preferred
10 embodiment of the present invention, the IDS 170 comprises a data processing system as herein before described with reference to Figure 1. The application software 80 of the IDS 170 includes intrusion detection code 200. The data 60 stored in the memory subsystem 40 of the IDS 170 includes attack
15 identity data 210 and disinfection data 220. The data 60 also includes a record of which of the IP addresses on the network 100 are free and belong to the second group 160, and which of the IP of the IP addresses 110 on the network 100 are assigned to data processing systems 150 and belong to the first group
20 140. The record is updated each time another IP address is allocated or an existing IP address allocation is removed. The attack identity data 210 contains data indicative of signatures identifying known attacks. The disinfection data 220 contains data indicative of: the nature of each attack;
25 how to disinfect a system infected with each attack; and how to resume normal network connectivity. The attack identity data 210 and disinfection data 220 are cross referenced. The intrusion detection code 200, when executed by the CPU 10, configures the IDS 170 to operate in accordance with the flow
30 diagram shown in Figure 4.

Referring now to Figure 4, in operation, the IDS 170 identifies data traffic on the network 100 originating at any assigned address 140 and addressed to any unassigned address 160. The IDS 170 inspects any data traffic so identified for
35 data indicative of an attack. On detection of data indicative of attack, the IDS 170 generates an alert signal. In a

preferred embodiment of the present invention, on generation of the alert signal, any data traffic originating at the address 140 assigned to the data processing system 150 originating the data indicative of the attack is rerouted to a
5 disinfection address on the network 100. In a particularly preferred embodiment of the present invention, the IDS 170 listens on the network 100 for traffic directed toward the free IP addresses 160. Specifically, at block 300, the IDS 170 examines requests sent from addresses 140 on the network 100
10 to determine, at block 310, if the request specifies one of the free IP addresses 160 as the destination address. If the request does not specify one of the free IP addresses 160, then, at block 320, the IDS 170 waits for the next request to examine.

15 The identification may also be realized by assigning the unassigned addresses to the IDS 170, such that any traffic directed at an unassigned address automatically arrives at the IDS 170.

If, however, the request specifies one of the free IP
20 addresses 160, then, at block 330, the IDS 170 spoofs an answer to the request. The answer is sent to the source IP address on the network 100. The free IP addresses 160 are not in use. Thus, any attempt to contact, for example, a system at such an address is *a priori* suspicious. At block 340, the IDS
25 170 listens for a reply to the spoofed answer. The IDS 170 may time out if no reply is received within a predetermined period, in which case, at block 320, the IDS 170 waits for the next request to examine. If a reply is however received, then, at block 350, the IDS 170 compares the suspect request and
30 reply with the attack identity data 210 stored in the memory subsystem 40. If, at block 350, the comparison fails to identify an attack, then, at block 320, the IDS 170 waits for the next request to examine. If, however, the comparison at block 350 detects a diagnosable attack in the reply, then the
35 IDS 170 determines that the source system 150 is infected. Accordingly, at block 360, the IDS 170 generates the alert

signal. The alert signal is sent to the router 130. The alert signal instructs the router 130 to divert all traffic from the infected system 150 to the disinfection address. Referring back to Figure 1, in a particularly preferred embodiment of the present invention, a disinfection server 180 is located at the disinfection address.

In a preferred embodiment of the present invention, on generation of the alert signal, the IDS 170 sends an alert message to the disinfection address. Preferably, the alert message comprises data indicative of the attack detected. Accordingly, in a particularly preferred embodiment of the present invention, the IDS 170 retrieves the disinfection data 220 corresponding to the attack detected from the memory subsystem 40. At block 370, the IDS 170 sends the alert message containing retrieved disinfection data to the disinfection address at which the disinfection server 180 resides. Then, at block 320, the IDS 170 waits for the next request to examine. Each request, answer, and reply may be embodied in one or more packets of data traffic on the network 100. Accordingly, the signature of each attack may span more than one packet.

In a preferred embodiment of the present invention, the disinfection data 220 sent to the disinfection server 180 contains data indicative of: the nature of the attack detected; how to disinfect the system 150 infected with the attack; and how to resume normal network connectivity. On receipt of the disinfection data 220 from the IDS 170, the disinfection server 180 sets about curing the infected system 150 and restoring the network 100. In another preferred embodiment of the present invention, the disinfection data 220 contains only data indicative of the nature of the attack. The disinfection server then selects, based the nature of the attack, one of a plurality of pre-stored techniques for disinfecting the infected system 150 and/or restoring the network 100 and executes the selected technique. The attacks may take many different forms. Accordingly, the corresponding

techniques for disinfection and network restoration may vary widely from one attack to the next.

In a preferred embodiment of the present invention, on receipt the disinfection data, the disinfection server 180 sends a
5 warning message to the infected system 150. The warning message informs the user of the infected system 150 that his or her system 150 is infected. The message may instruct the user to run anti-virus software pre-stored in the infected system 150 to eliminate or otherwise isolate the infection.
10 Alternatively, the message may contain disinfection program code for eliminating the attack from the infected system 150, together with instructions to assist the user in executing the disinfection code on the infected system 150. In another alternative, the message may direct the user to another web
15 site, at which appropriate disinfection program code is provided. In another preferred embodiment of the present invention, the message contains disinfection program code that, when loaded into the infected system, executes automatically, thus eliminating or otherwise isolating the
20 infection in a manner which is transparent to the user. Other disinfection schemes are possible.

In the embodiments of the present invention herein before described, the disinfection server 180 is implemented in a single data processing system such as that herein before
25 described with reference to Figure 1. However, in other embodiments of the present invention, the disinfection server 180 may be implemented by multiple interconnected data processing systems. Such data processing may be distributed or located together in a "farm". Each data processing system in
30 the disinfection server may be dedicated to handling a different attack. The IDS 170 may also be implemented by multiple integrated data processing systems. Alternatively, the IDS 170 and the disinfection server 180 may be integrated in a single data processing system.

The traffic on the network 100 sent from the infected system 150 and deflected by the router 130 to the disinfection server 180 may be logged and/or discarded by the disinfection server 180. In the embodiments of the present invention herein before
5 described, the IDS 170 sends disinfection data to the disinfection server 220. However, in other embodiments of the present invention, once an infection is detected, the IDS 170 may simply instruct the router 130 to deflect traffic from the infected system 150 to the disinfection server 180 without the
10 IDS 170 additionally supplying disinfection data 220 to the disinfection server 180. The disinfection server 180 may then simply act as a repository for traffic originating in the infected system 150, logging and/or discarding traffic it receives from the infected system 150. The logging and
15 discarding may be reported by the disinfection server 180 to an administrator of the network 100. Such reports may be delivered periodically or in real time. The reporting may be performed via, for example, an administration console. However, other reporting techniques, such as printed output
20 for example, are possible. On receipt of such reports, administrators can take actions appropriate for eliminating or otherwise containing the infection of the network 100.

In the embodiments of the present invention herein before described, the IDS 170, router 130, and disinfection server
25 180 are implemented by data processing systems programmed with appropriate program code. However, it will be appreciated that, in other embodiments of the present invention, one or more of the functions described herein as being implemented in software may be implemented at least partially in hardwired
30 logic circuitry.

It will also be appreciated that the attack detection methods described herein may be implemented by the service provider responsible for the network 100, or at least partially by a third party in the form of a service to the service provider.
35 Such a service may differentiate the service offered by the service provider from the services provided by its competitors.

Such differentiated services may be optionally supplied to end users of the network service provided in exchange for an additional premium.

The service of detecting attacks for networks used by an entity other than the service provider, may in a preferred embodiment comprise billing for the service delivered. The charge to be billed may therein be determined in dependence of one or more of a number of factors that typically are indicative of the complexity or workload experienced by the service provider. Such factors indicative of volume and time-consumption of the service provided may include the size of the network, the number of unassigned addresses monitored, the number of assigned addresses monitored, the volume of data traffic inspected, the number of attacks identified, the number of alerts generated, the volume of rerouted data traffic. Factors identifying a level of increased complexity can be the signature of the identified attack, the degree of network security achieved. Also factors identifying the value of the service provided to the serviced entity may be used such as the turnover of said entity, the field of business of said entity, or the like.

Of course, any combination of the previously mentioned factors is possible, in particular being differently weighed to determine a final charge. The billing can be automated in that the charge is sent together with one of the messages sent in the attack detection process. This advantageously combines the use of the messaging for the attack-handling purpose together with its use for the billing purpose. The double use of a message provides the technical advantage of reducing the traffic flow generated through the attack detection and billing process. At the same time this method can be used to guarantee that the serviced entity is only billed for exactly the service provided.

Another preferred solution for billing is offering the entity a subscription to the attack detection service that allows the

serviced entity to profit from the attack detection process for a predetermined time, volume of traffic, number of systems or the like. The service provider may offer his own disinfection server as a hosting unit to be used in

5 combination with the network used by the serviced entity, but it is also possible that the disinfection server is held, maintained, hosted or leased by the serviced entity.

In a further preferred embodiment the service provider may utilize a synergistic effect by providing the attack detection
10 service to several entities, and sharing the resources, such as the router 130, intrusion detection sensor 170 and disinfection server 180 among the several services. Thereby not only more efficient use of the employed resources can be obtained but also attack-related information between the
15 different networks can be shared and could be utilized to improve the detection quality on the serviced networks. For instance the detection of an attack on one network could lead to a quicker detection on another network since the process of determining an attack signature can be shortened or even
20 eliminated. Also the disinfection mechanism can be shared between the serviced entities thereby reducing their effort and costs related to updating and maintaining the disinfection mechanism. The technical advantage of sharing technical data that is derived from the handling of attacks to the network of
25 one entity to improve the attack handling of another serviced entity will provide an incentive for entities to join a pool of several entities being serviced by the same service provider for intrusion detection. The billing model could in a preferred embodiment be adapted to incent the participation of
30 entities in a group of entities sharing the detection resources and employing the same service provider.

Herein the term "connect" is not limited to physical connections. It is for exapmle intended to also encompass a general link that allows the sending or receiving of
35 information. The connection can therein be indirect.

CLAIMS

1. A method for detecting attacks on a data communications network having a plurality of addresses for assignment to data processing systems in the network, the method comprising:
 - 5 identifying data traffic on the network originating at any assigned address and addressed to any unassigned address; inspecting any data traffic so identified for data indicative of an attack; and, on detection of data indicative of an attack, generating an alert signal.
- 10 2. A method as claimed in claim 1, wherein the inspecting comprises spoofing replies to requests contained in the data traffic identified.
3. A method as claimed in claim 1, comprising, on generation of the alert signal, rerouting any data traffic originating at
15 the address assigned to the data processing system originating the data indicative of the attack to a disinfection address on the network.
4. A method as claimed in claim 1, comprising, on generation of the alert signal, sending an alert message to the
20 disinfection address.
5. A method as claimed in claim 5, wherein the alert message comprises data indicative of the attack detected.
6. A method as claimed in claim 5, comprising, on receipt of the alert message, sending a warning message from the
25 disinfection address to the address assigned to the data processing system originating the data indicative of the attack.
7. A method as claimed in claim 6, comprising including in the warning message program code for eliminating the attack

when executed by the data processing system originating the data indicative of the attack.

8. Apparatus for detecting attacks on a data communications network having a plurality of addresses for assignment to data processing systems in the network, the apparatus comprising:
5 an intrusion detection sensor for identifying data traffic on the network originating at any assigned address and addressed to any unassigned address, inspecting any data traffic so identified for data indicative of an attack, and, on detection
10 of data indicative of an attack, generating an alert signal.

9. Apparatus as claimed in claim 8, wherein the intrusion detection sensor in use inspects the data traffic identified by spoofing replies to requests contained in the data traffic identified.

15 10. Apparatus as claimed in claim 8, further comprising a router connected to the intrusion detection sensor for rerouting, in response to generation of the alert signal, any data traffic originating at the address assigned to the data processing system originating the data indicative of the
20 attack to a disinfection address on the network.

11. Apparatus as claimed in claim 8, wherein the intrusion detection sensor, on generation of the alert signal, sends an alert message to the disinfection address.

12. Apparatus as claimed in claim 11, wherein the alert
25 message comprises data indicative of the attack detected.

13. Apparatus as claimed in claim 12, further comprising a disinfection server assigned to the disinfection address, the disinfection server sending, on receipt of the alert message, a warning message to the address assigned to the data
30 processing system originating the data indicative of the attack.

14. Apparatus as claimed in claim 13, wherein the warning message comprises program code for eliminating the attack when executed by the data processing system originating the data indicative of the attack.

5 15. A data communications network comprising: a plurality of addresses for assignment to data processing systems in the network; and, apparatus for detecting attacks on the network as claimed in any of claims 8 to 14.

16. A computer program element comprising computer program
10 code means which, when loaded in a processor of a data processing system, configures the processor to perform a method for detecting attacks on a data communications network as claimed in any of claims 1 to 7.

17. A method as claimed in claim 1, further comprising
15 supporting an entity in the handling of the detected attack by one of providing instructions for use of, assistance in executing, and execution of disinfection program code.

18. A method as claimed in claim 1, further comprising
20 providing a report to said entity containing information related to one of alert, disinfection, rerouting, logging, discarding of data traffic in the context of a detected attack.

19. A method as claimed in claim 1, further comprising billing
said entity for the execution of at least one of the steps
25 contained in claims 1 to 7, the charge being billed preferably being determined in dependence of one of the size of the network, the number of unassigned addresses monitored, the number of assigned addresses monitored, the volume of data traffic inspected, the number of attacks identified, the
30 number of alerts generated, the signature of the identified attack, the volume of rerouted data traffic, the degree of network security achieved, the turnover of said entity.

20. A method as claimed in claim 1, further comprising providing said method for several entities and using technical data derived from the attack-handling for one of said entities for the attack-handling for another of said entities.

5 21. A method for deploying an intrusion detection application for an entity, comprising

. connecting an intrusion detection sensor to a network used by said entity for identifying data traffic on the network originating at any assigned address and addressed to
10 any unassigned address, and for inspecting any data traffic so identified for data indicative of an attack and for, on detection of data indicative of an attack, generating an alert signal,

- connecting a router to said network for rerouting, in
15 response to generation of the alert signal, any data traffic originating at the address assigned to the data processing system originating the data indicative of the attack to a disinfection address on the network.

22. A method according to claim 21, further comprising

20 - connecting a disinfection server assigned to the disinfection address, to the network, the disinfection server being adapted for sending, on receipt of the alert message, a warning message to the address assigned to the data processing system originating the data indicative of the attack.

1/4

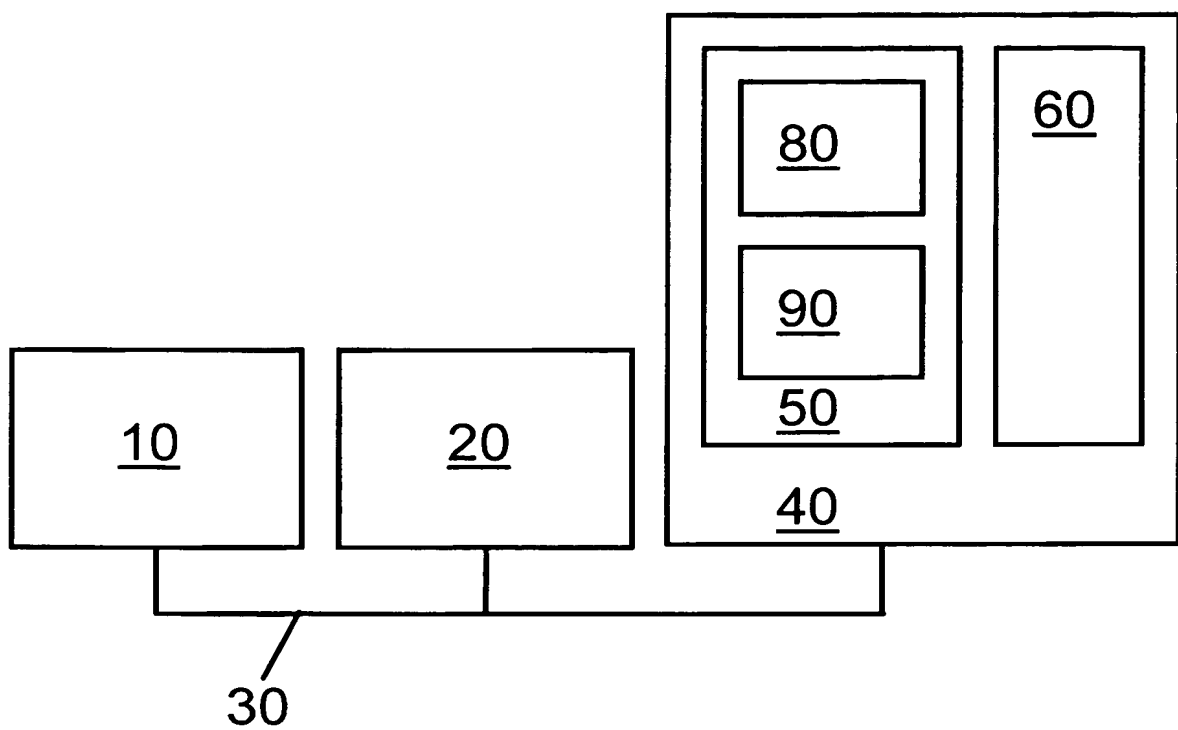


Fig.1

2/4

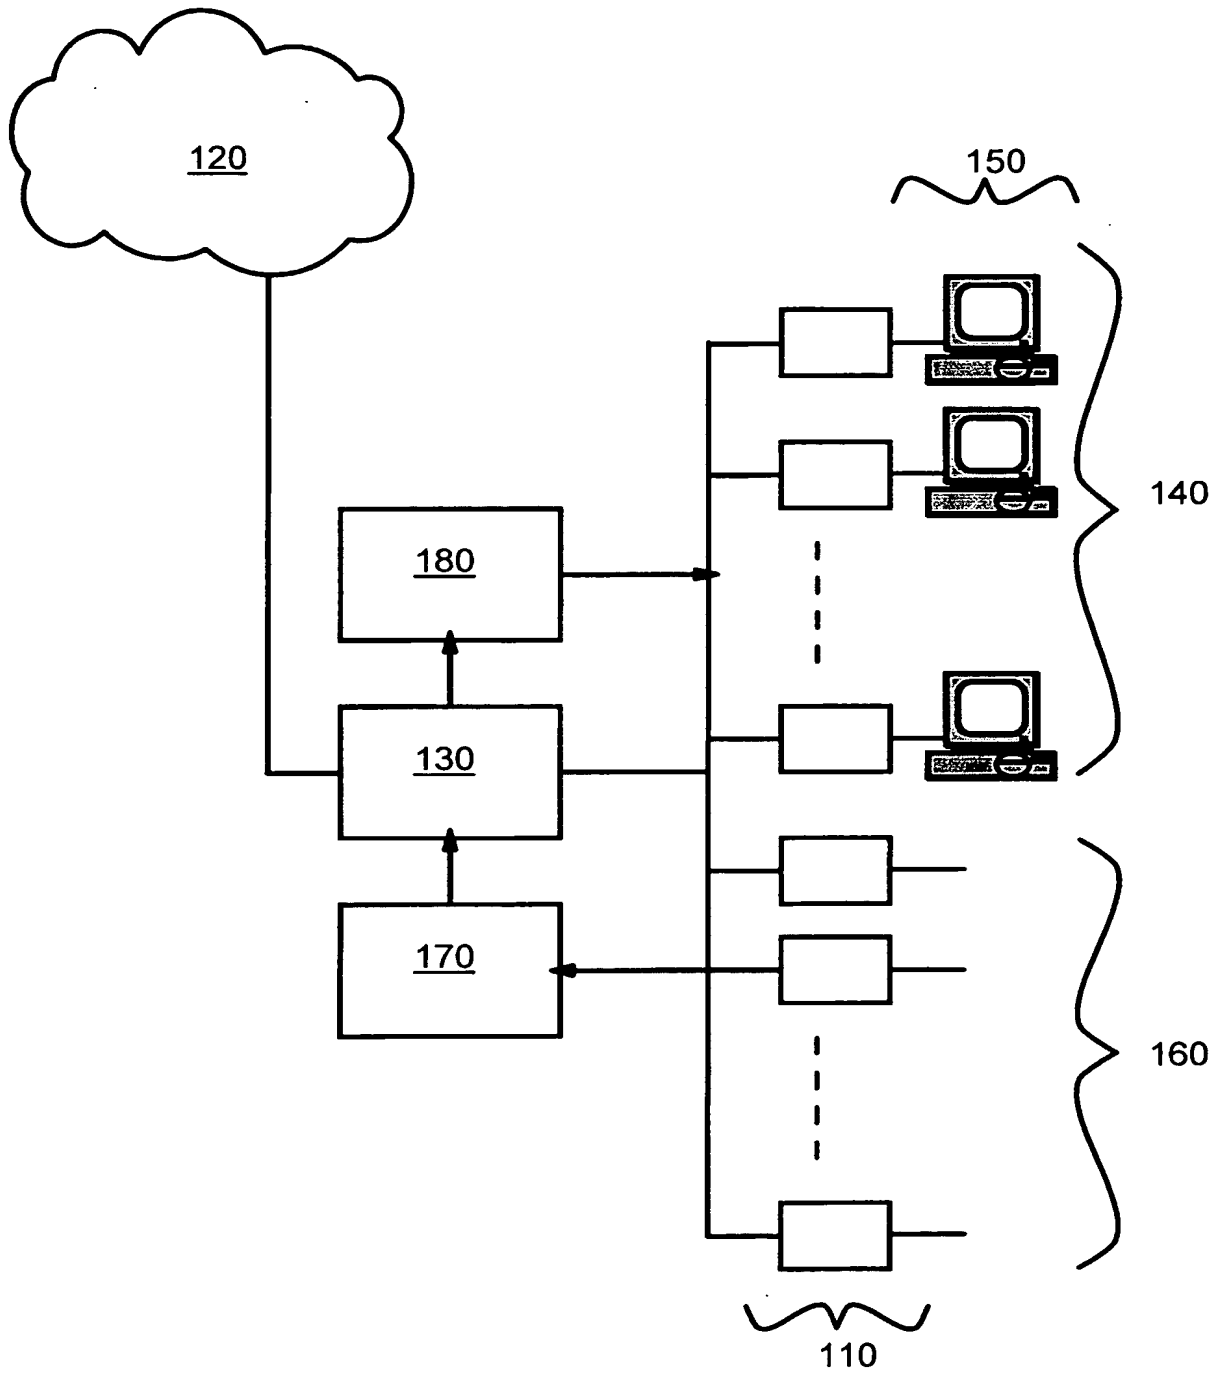


Fig.2

3/4

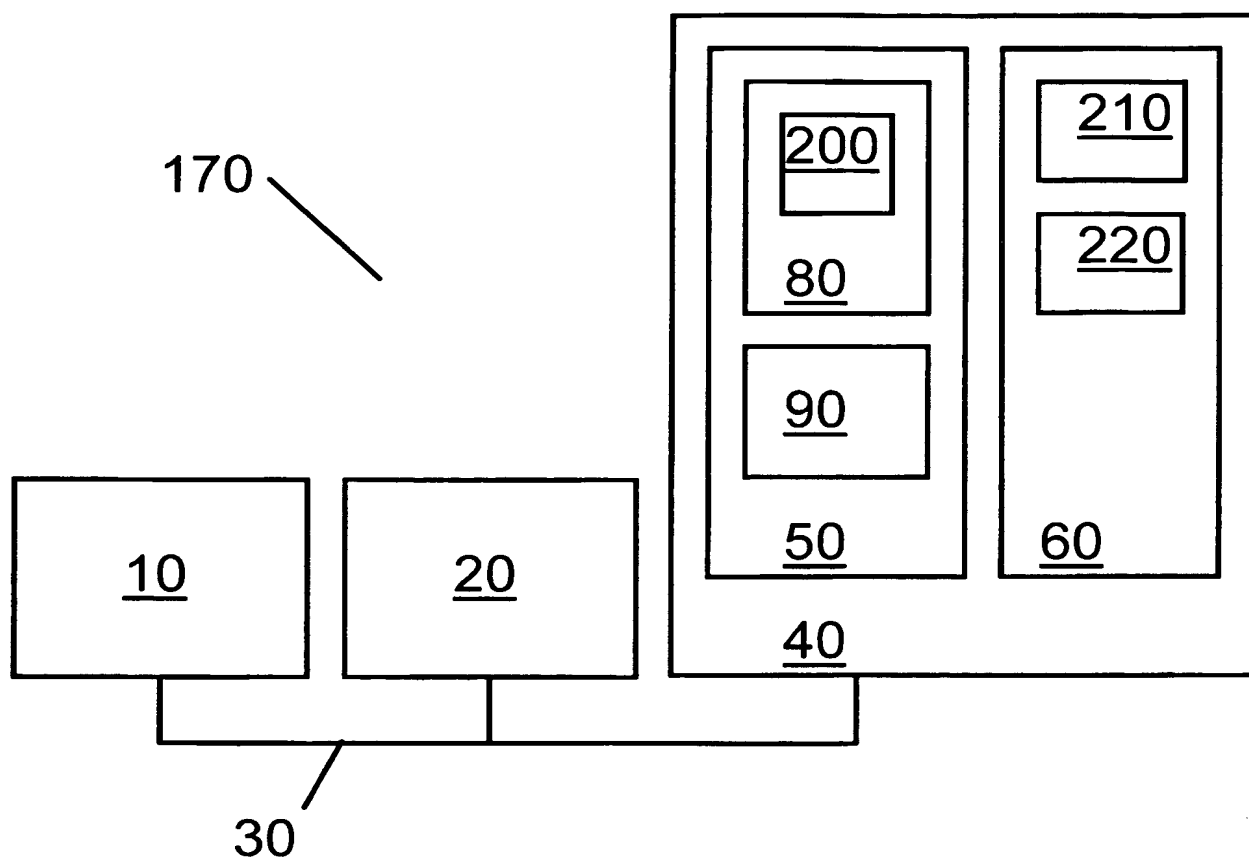


Fig.3

4/4

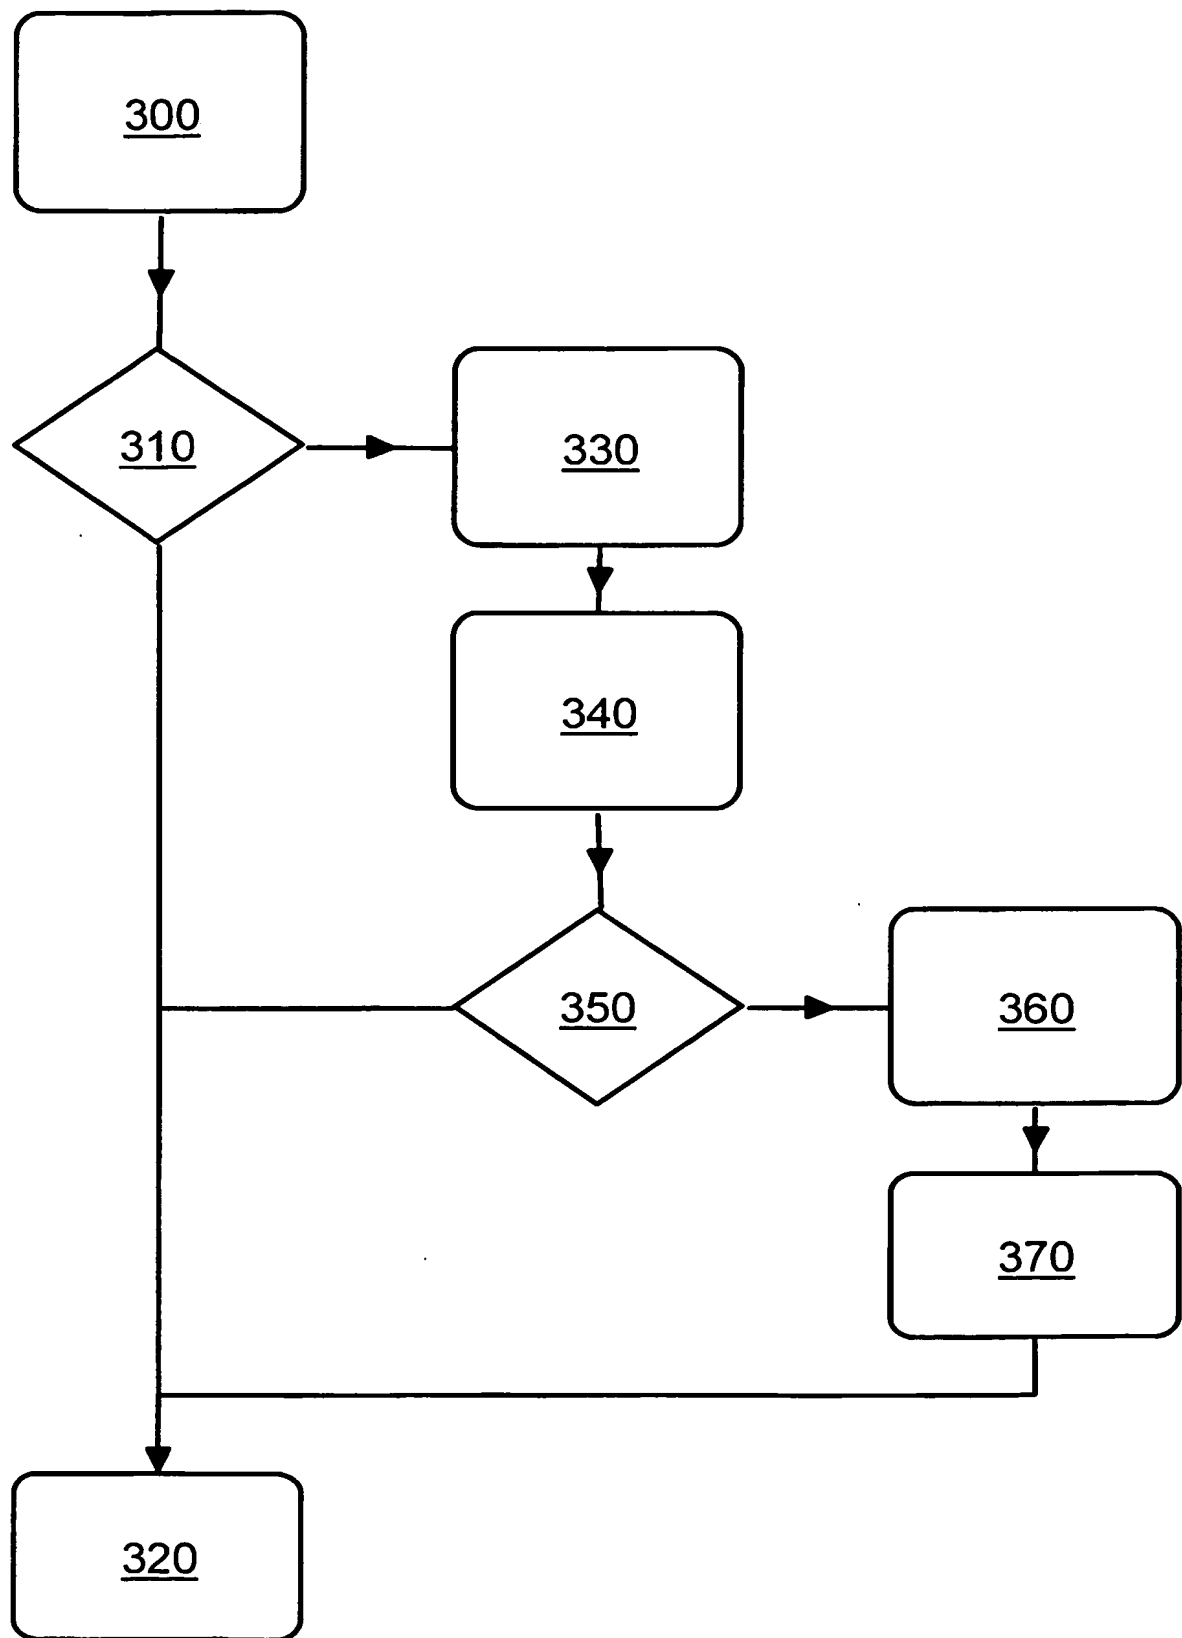


Fig.4

INTERNATIONAL SEARCH REPORT

Internati pplication No
PCT/IB 03/05328

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L29/06 G06F1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	<p>WO 02 061510 A (COPELAND JOHN A III ;LANCOPE INC (US)) 8 August 2002 (2002-08-08)</p> <p>abstract page 4, line 7 - line 15 page 6, line 14 -page 7, line 2 page 9, line 6 - line 22 page 10, line 4 - line 22 page 12, line 8 -page 15, line 27 figures 2,3</p> <p style="text-align: center;">--- -/--</p>	<p>1,3-8, 10-19, 21,22 2,9,20</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

8 March 2004

Date of mailing of the international search report

15/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kopp, K

INTERNATIONAL SEARCH REPORT

Internat^l Application No

PCT/IB 03/05328

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2002/156898 A1 (POIRIER DANIEL EARL ET AL) 24 October 2002 (2002-10-24) abstract paragraph '0005! - paragraph '0006! paragraph '0020! - paragraph '0021! paragraph '0023! paragraph '0045! - paragraph '0050! figures 1,4,5,7 -----	1,8,15, 16,21
Y	WO 02 086724 A (RECOURSE TECHNOLOGIES INC) 31 October 2002 (2002-10-31) page 3, line 6 - line 9 page 4, line 11 - line 16 -----	3,4,10, 11
Y	WO 02 03653 A (BRITISH TELECOMM ;SOPPERA ANDREA (IT)) 10 January 2002 (2002-01-10) abstract page 1, line 7 - line 13 page 1, line 22 -page 2, line 32 -----	5-7, 12-14, 17,18,22
Y	US 2002/105910 A1 (BRANDON KEVIN WILLIAM ET AL) 8 August 2002 (2002-08-08) paragraph '0024! - paragraph '0025! -----	19

INTERNATIONAL SEARCH REPORT

 Internatio plication No
 PCT/IB 03/05328

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 02061510 A	08-08-2002	AU 3054102 A	11-06-2002
		CA 2430571 A1	06-06-2002
		CA 2436710 A1	08-08-2002
		EP 1338130 A2	27-08-2003
		EP 1358559 A2	05-11-2003
		US 2003105976 A1	05-06-2003
		WO 0245380 A2	06-06-2002
		WO 02061510 A2	08-08-2002
		US 2002144156 A1	03-10-2002
US 2002156898 A1	24-10-2002	NONE	
WO 02086724 A	31-10-2002	US 2002162017 A1	31-10-2002
		WO 02086724 A1	31-10-2002
WO 0203653 A	10-01-2002	AU 6617401 A	14-01-2002
		CA 2410522 A1	10-01-2002
		EP 1295454 A2	26-03-2003
		WO 0203653 A2	10-01-2002
		US 2003172289 A1	11-09-2003
US 2002105910 A1	08-08-2002	US 6381242 B1	30-04-2002
		AU 8062501 A	13-03-2002
		EP 1314285 A1	28-05-2003
		WO 0219639 A1	07-03-2002